


# Elmyra 2 cheat sheet v2.2

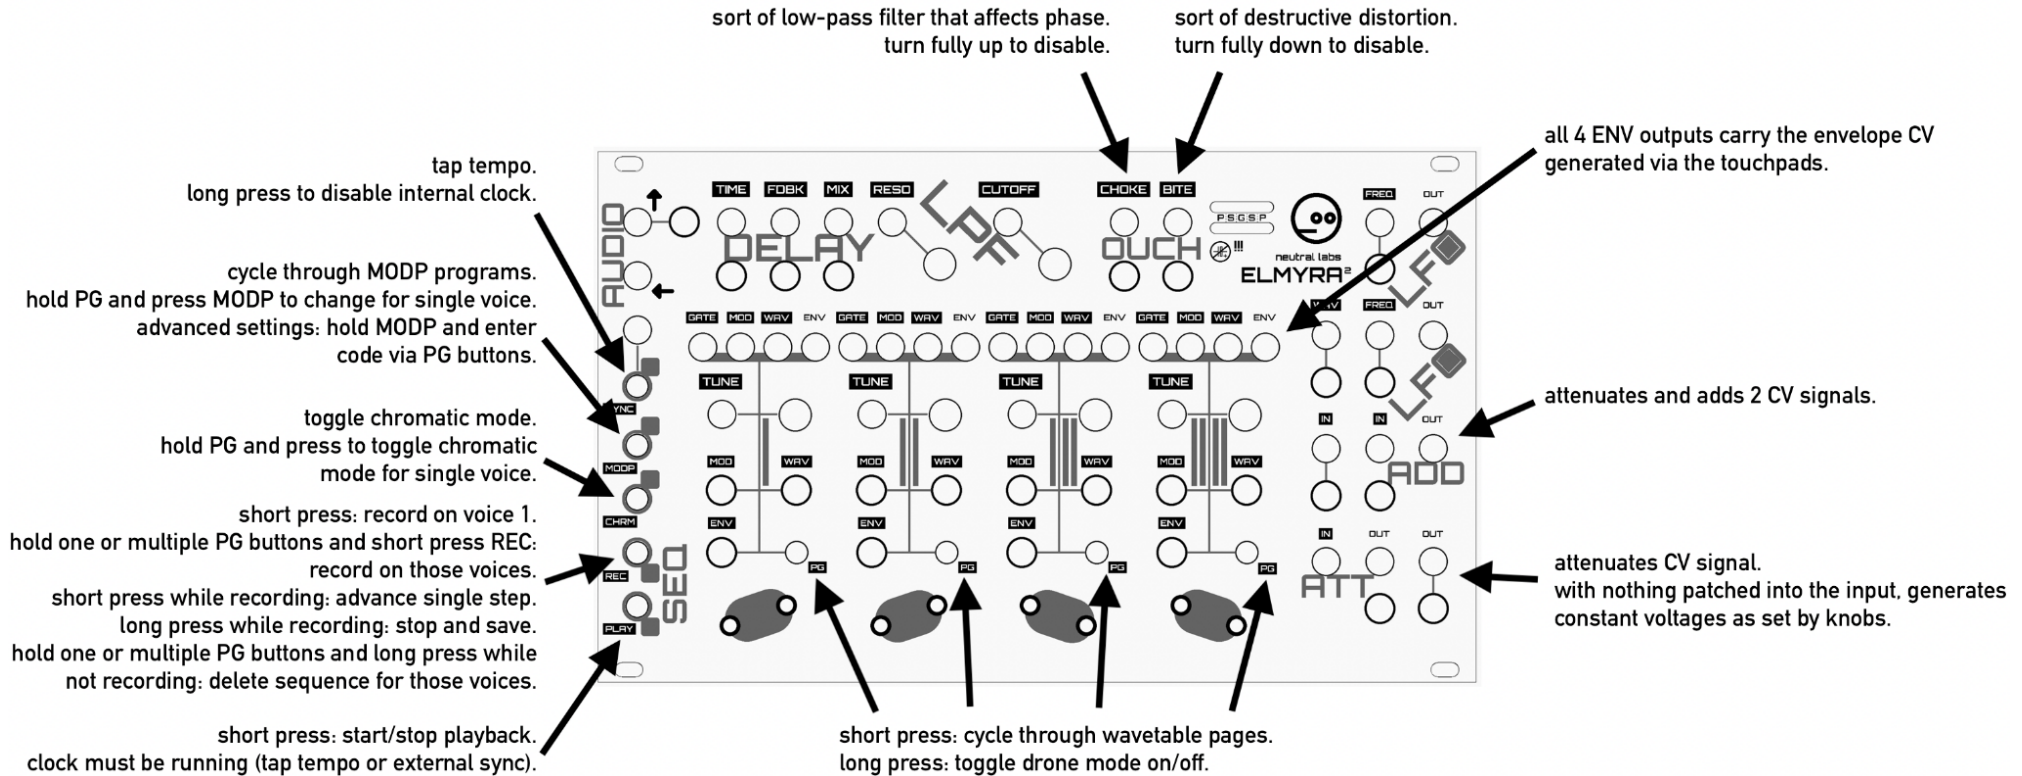

short press: < 1 second  
long press: >= 1 second

Setting	Code	Function
Reverb	441	off*
	442	on
Mix saturation	121	none
	122	soft
	123	hard*
	124	dirty
Microtonal tuning	111	7-EDO
	112	9-EDO
	113	15-EDO
	114	17-EDO
	1111	12-EDO*
Delay sync	131	unsynced*
	132	synced
Signal routing	133	default*
	134	reversed
Filter	331	ladder LPF
	332	SV LPF*
	333	SV BPF
	334	SV HPF
	3311	HP/LP series
	3312	HP/LP parallel
	3313	base-width
	3314	base-width notch

Setting	Code	Function
Octave	231	voice 1
	232	voice 2
	233	voice 3
	234	voice 4
LFO advanced functions	241	reset LF01*
	242	reset LF02*
	243	copy LFO
	244	cycle LF02 WT
	2411	LF01 S&H
	2412	LF01 S&G
	2413	LF02 S&H
	2414	LF02 S&G
LFO sync	141	LF01 free*
	142	LF01 sync
	143	LF02 free*
	144	LF02 sync
Portamento	221	none*
	222	fast
	223	medium
	224	slow
Calibrate 1V/octave	211	calibrate
	212	store
	213	5V default
	214	12V default

Colour	MODP effect
red	DETUNE
green	SUBOSC
mint	CHORD
purple	SHAPER
blue	SATURATOR
cyan	BITMANGLER
yellow	SRR
white	NOISE
pink	LPF
lime	HPF

\* marks default settings